

# Ida HYPE 8 G3

WITH BATTERY SIZE 312



 **Audio Service**

## PRODUCT FEATURES

Semi-modular ITC

## BASIC FEATURES

Battery compartment as on/off switch

Rocker switch (integrated in battery compartment lid), can be programmed as a program button, program button with on/off function, volume control, tone control

Level-dependent signal tones/melodies (activate/deactivate) for low battery voltage, program change, volume control, on/off function

Audiomatic power-on delay (P) (activate/deactivate)

Wax guard HF 3 Black or HF 4 Black

Microphone filter Microsafe

Magnetic battery mounting and changing tool

## OPTIONS



Smart Remote App

## PROGRAMMING CABLE AND ADAPTER

Cable for HiPro interface, right Art.-No. 029 44 986

Cable for HiPro interface, left Art.-No. 029 49 994

Cable for Noah-Link interface, right Art.-No. 106 02 843

Cable for Noah-Link interface, left Art.-No. 106 02 842

Adapter for HiPro and Noah-Link cable Art. No. 072 02 901

## TECHNICAL FEATURES

24 signal processing channels / 12 frequency channels

12 AGC channels / 12 MPO channels

5 hearing programs

Data Logging

## SIGNAL PROCESSING

Anti-Feedback system G3

Noise Manager

› Adaptive noise reduction

› Wiener filter

› Adaptive wind noise reduction

› Impulse suppressor

› Auto-situation adaption

AudioTronic multi-microphone system

› Panorama

› Directional static

› Automatic

› Adaptive

Frequency and dynamics concept

› TRC S


› Selective frequency compression

## AUTOMATIC FUNCTIONS

Acclimatic

Comformatic

## FITTING RANGE

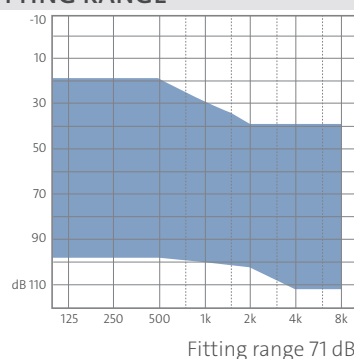

P = Patent

For more information about features please check out our website [www.audioservice.com](http://www.audioservice.com)

# Ida HYPE 8 G3


Gain 71 dB




## MAXIMUM OUTPUT

Input: 90 dB

IEC 60118-7:2005<sup>1)</sup>  
ANSI S3.22-2009<sup>1)</sup>


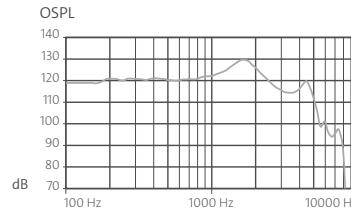


IEC 60118-0<sup>2)</sup>

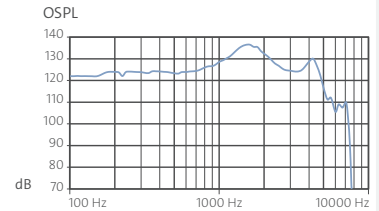

## MAXIMUM GAIN

Input: 50 dB

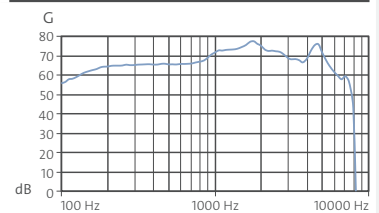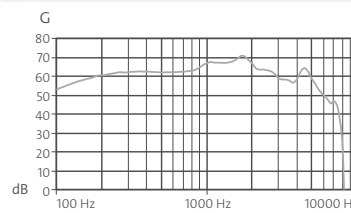

## TECHNICAL INFORMATION

### MAXIMUM OUTPUT

Peak value at 90 dB	131 dB	138 dB
1,600 Hz (RTF)	128 dB	135 dB
HFA (High Frequency Average)	122 dB	126 dB

### FULL ON GAIN

Peak value at 50 dB	71 dB	78 dB
1,600 Hz (RTF)	69 dB	76 dB
HFA (High Frequency Average)	67 dB	71 dB
Reference test gain	45 dB	69 dB

### TECHNICAL FEATURES

Battery type	312	312
Battery life in hours	93	93
Frequency range	100 – 6,700 Hz	150 – 6,000 Hz
Battery current consumption	1.20 mA	1.20 mA
Equivalent noise level	18 dB	17 dB
Distortion		
500 Hz	2%	4%
800 Hz	2%	3%
1,600 Hz	1%	2%

<sup>1)</sup> Technical data measured in accordance with IEC 60118-7:2005 and ANSI S3.22-2009 at 2 ccm coupler

<sup>2)</sup> Technical data measured in accordance with IEC 60118-0 at ear simulator



**WARNING** Small parts present a choking hazard.  
This device is not suitable for fitting to babies, small children or mentally disabled persons.



**WARNING** The maximum output levels of the hearing systems can reach or exceed 132 dB SPL.  
Risk of injury to the hearing of the wearer. Ensure that the hearing systems are fitted with care.

For control ranges and more programming features see Hearing Instrument Simulation of Connex 7.5 and AudioFit 7.5 or higher.