

Rixx 16 G3

RECEIVER-IN-CANAL HEARING SYSTEM (RIC) WITH BATTERY SIZE 10



PRODUCT FEATURES

Receiver-in-Canal hearing system (RIC) with external receiver
For open and closed fitting

BASIC FEATURES

Battery compartment as on/off switch
Program button
Level-dependent signal tones/melodies (activate/deactivate) for low battery voltage, program change, on/off function
Personal-Color-Concept
Audiomatic power-on delay (P) (activate/deactivate)
IP67-certified

OPTIONS



Smart Remote App
External receiver S with FOG = 45 dB¹⁾
External receiver M with FOG = 55 dB¹⁾
External receiver P with FOG = 60 dB¹⁾
Customised CLIC MOULD 2.0 (Open or Power)
Click Domes (Open, Semi-open, Closed or Double)

PROGRAMMING ADAPTER

Adapter 10 Art. No. 108 24 471

HOUSING COLORS



TECHNICAL FEATURES

40 signal processing channels / 20 frequency channels
20 AGC channels / 20 MPO channels
6 hearing programs
Data Logging

SIGNAL PROCESSING

Anti-Feedback system G3
Noise Manager

- > Adaptive noise reduction
- > Wiener filter
- > Adaptive wind noise reduction
- > Impulse suppressor
- > Auto-situation adaption
- > Selectronic

AudioTronic multi-microphone system

- > Panorama
- > Directional static
- > Automatic
- > Adaptive
- > Speech 360




Frequency and dynamics concept

- > TRC S
- > Selective frequency compression
- > HiFi functionality

AUTOMATIC FUNCTIONS

Intelligent Acclimatic
Comformatic

FITTING RANGES

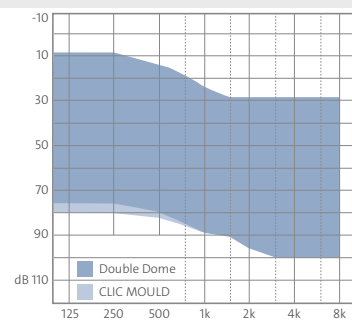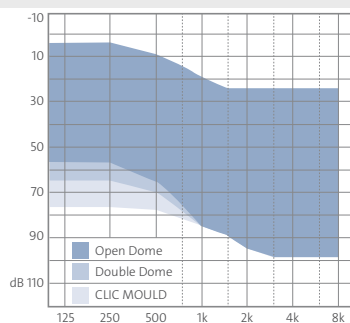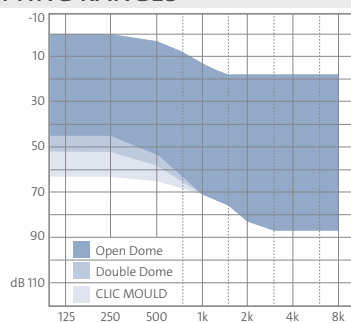

¹⁾ measured in accordance with IEC 60118-7:2005 and ANSI S3.22-2009
P = Patent

Rixx 16 G3

Gain 45 dB



 **Audio Service**



MAXIMUM OUTPUT

Input: 90 dB



MAXIMUM GAIN

Input: 50 dB

IEC 60118-7:2005²⁾
ANSI S3.22-2009²⁾

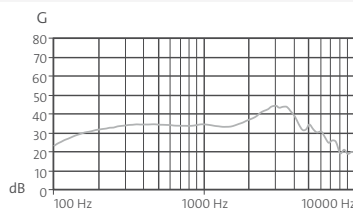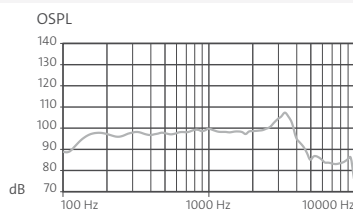

IEC 60118-0³⁾

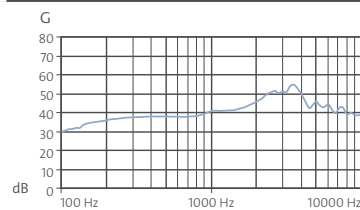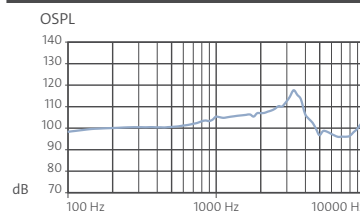

TECHNICAL INFORMATION

MAXIMUM OUTPUT

Peak value at 90 dB	108 dB	118 dB
1,600 Hz (RTF)	99 dB	107 dB
HFA (High Frequency Average)	100 dB	105 dB

FULL ON GAIN

Peak value at 50 dB	45 dB	55 dB
1,600 Hz (RTF)	35 dB	43 dB
HFA (High Frequency Average)	37 dB	42 dB
Reference test gain	23 dB	36 dB

TECHNICAL FEATURES

Battery type	10	10
Battery life in hours	90	90
Frequency range	100 – 10,000 Hz	100 – 10,500 Hz
Battery current consumption	0.70 mA	0.70 mA
Equivalent noise level	19 dB	22 dB
Distortion		
500 Hz	1%	1%
800 Hz	1%	1%
1,600 Hz	1%	2%

²⁾ Technical data measured in accordance with IEC 60118-7:2005 and ANSI S3.22-2009 at 2 ccm coupler

³⁾ Technical data measured in accordance with IEC 60118-0 at ear simulator



WARNING

Small parts present a choking hazard.
This device is not suitable for fitting to babies, small children or mentally disabled persons.

For control ranges and more programming features see Hearing Instrument Simulation of Connex 7.5 and AudioFit 7.5 or higher.

Rixx 16 G3

Gain 55 dB



Audio Service



MAXIMUM OUTPUT

Input: 90 dB



MAXIMUM GAIN

Input: 50 dB

IEC 60118-7:2005²⁾
ANSI S3.22-2009²⁾

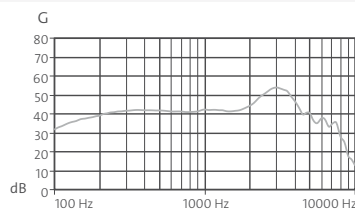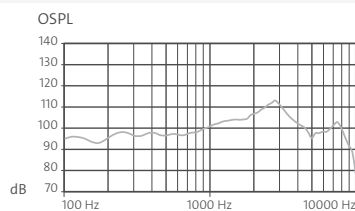

IEC 60118-0³⁾

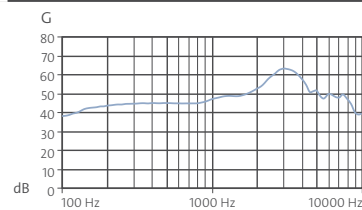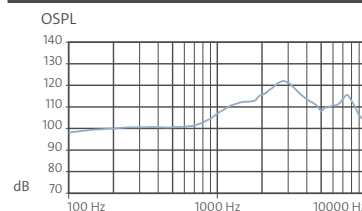

TECHNICAL INFORMATION

MAXIMUM OUTPUT

Peak value at 90 dB	113 dB	123 dB
1,600 Hz (RTF)	104 dB	112 dB
HFA (High Frequency Average)	105 dB	107 dB

FULL ON GAIN

Peak value at 50 dB	55 dB	65 dB
1,600 Hz (RTF)	42 dB	50 dB
HFA (High Frequency Average)	45 dB	49 dB
Reference test gain	28 dB	43 dB

TECHNICAL FEATURES

Battery type	10	10
Battery life in hours	63	63
Frequency range	100 – 8,700 Hz	100 – 10,000 Hz
Battery current consumption	1.00 mA	1.00 mA
Equivalent noise level	19 dB	22 dB
Distortion		
500 Hz	1%	2%
800 Hz	2%	3%
1,600 Hz	1%	2%

²⁾ Technical data measured in accordance with IEC 60118-7:2005 and ANSI S3.22-2009 at 2 ccm coupler

³⁾ Technical data measured in accordance with IEC 60118-0 at ear simulator



WARNING

Small parts present a choking hazard.

This device is not suitable for fitting to babies, small children or mentally disabled persons.

For control ranges and more programming features see Hearing Instrument Simulation of Connex 7.5 and AudioFit 7.5 or higher.

Rixx 16 G3

Gain 60 dB



Audio Service



MAXIMUM OUTPUT

Input: 90 dB



MAXIMUM GAIN

Input: 50 dB

IEC 60118-7:2005²⁾
ANSI S3.22-2009²⁾

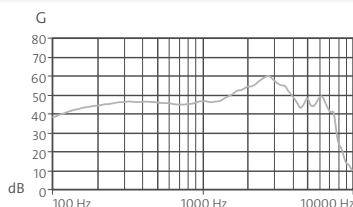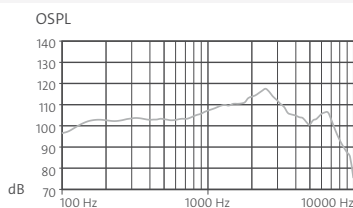

IEC 60118-0³⁾

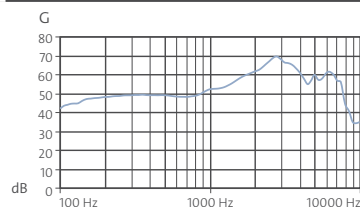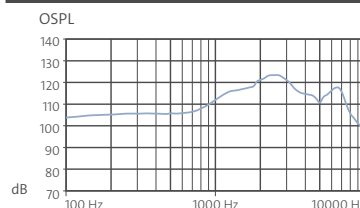

TECHNICAL INFORMATION

MAXIMUM OUTPUT

Peak value at 90 dB	118 dB	126 dB
1,600 Hz (RTF)	110 dB	118 dB
HFA (High Frequency Average)	112 dB	114 dB

FULL ON GAIN

Peak value at 50 dB	60 dB	70 dB
1,600 Hz (RTF)	50 dB	58 dB
HFA (High Frequency Average)	52 dB	54 dB
Reference test gain	35 dB	51 dB

TECHNICAL FEATURES

Battery type	10	10
Battery life in hours	70	70
Frequency range	100 – 7,800 Hz	100 – 8,500 Hz
Battery current consumption	0.90 mA	0.90 mA
Equivalent noise level	19 dB	22 dB
Distortion		
500 Hz	1%	1%
800 Hz	2%	2%
1,600 Hz	1%	1%

²⁾ Technical data measured in accordance with IEC 60118-7:2005 and ANSI S3.22-2009 at 2 ccm coupler

³⁾ Technical data measured in accordance with IEC 60118-0 at ear simulator



WARNING Small parts present a choking hazard.
This device is not suitable for fitting to babies, small children or mentally disabled persons.

For control ranges and more programming features see Hearing Instrument Simulation of Connexx 7.5 and AudioFit 7.5 or higher.

AS AUDIO-SERVICE GmbH · Alter Postweg 190 · 32584 Löhne · Germany
info@audioservice.com · www.audioservice.com