

Rixx 6 G3

RECEIVER-IN-CANAL HEARING SYSTEM (RIC) WITH BATTERY SIZE 10



 **Audio Service**

PRODUCT FEATURES

Receiver-in-Canal hearing system (RIC) with external receiver
For open and closed fitting

BASIC FEATURES

Battery compartment as on/off switch
Program button
Level-dependent signal tones/melodies (activate/deactivate) for low battery voltage, program change, on/off function
Personal-Color-Concept
Audiomatic power-on delay (P) (activate/deactivate)
IP67-certified

OPTIONS




Smart Remote App
External receiver S with FOG = 45 dB¹⁾
External receiver M with FOG = 55 dB¹⁾
External receiver P with FOG = 60 dB¹⁾
Customised CLIC MOULD 2.0 (Open or Power)
Click Domes (Open, Semi-open, Closed or Double)

PROGRAMMING ADAPTER

Adapter 10 Art. No. 108 24 471

HOUSING COLORS

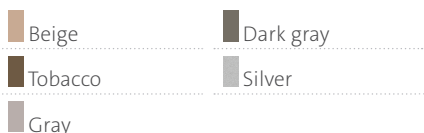

TECHNICAL FEATURES

16 signal processing channels / 8 frequency channels
8 AGC channels / 8 MPO channels
4 hearing programs
Data Logging


SIGNAL PROCESSING

Anti-Feedback system G3
Noise Manager
 > Adaptive noise reduction
 > Wiener filter
 > Adaptive wind noise reduction
 > Impulse suppressor
AudioTronic multi-microphone system
 > Directional static
 > Automatic
 > Adaptive
Frequency and dynamics concept
 > TRC S
 > Selective frequency compression


AUTOMATIC FUNCTIONS

Acclimatic


FITTING RANGES



Fitting range external receiver 45 dB



Fitting range external receiver 55 dB



Fitting range external receiver 60 dB

¹⁾ measured in accordance with IEC 60118-7:2005 and ANSI S3.22-2009

P = Patent

Rixx 6 G3

Gain 45 dB





MAXIMUM OUTPUT

Input: 90 dB



MAXIMUM GAIN

Input: 50 dB

IEC 60118-7:2005²⁾
ANSI S3.22-2009²⁾

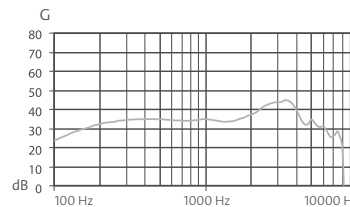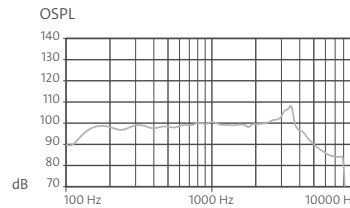

IEC 60118-0³⁾

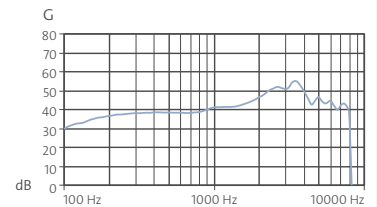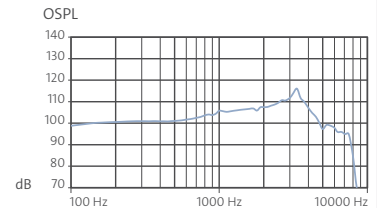

TECHNICAL INFORMATION

MAXIMUM OUTPUT

Peak value at 90 dB	108 dB	118 dB
1,600 Hz (RTF)	99 dB	107 dB
HFA (High Frequency Average)	100 dB	105 dB

FULL ON GAIN

Peak value at 50 dB	45 dB	55 dB
1,600 Hz (RTF)	35 dB	43 dB
HFA (High Frequency Average)	37 dB	42 dB
Reference test gain	23 dB	36 dB

TECHNICAL FEATURES

Battery type	10	10
Battery life in hours	70	70
Frequency range	100 – 8,200 Hz	100 – 8,300 Hz
Battery current consumption	0.90 mA	0.90 mA
Equivalent noise level	19 dB	22 dB
Distortion		
500 Hz	1%	1%
800 Hz	1%	1%
1,600 Hz	1%	2%

²⁾ Technical data measured in accordance with IEC 60118-7:2005 and ANSI S3.22-2009 at 2 ccm coupler

³⁾ Technical data measured in accordance with IEC 60118-0 at ear simulator

⚠ WARNING Small parts present a choking hazard.
This device is not suitable for fitting to babies, small children or mentally disabled persons.

For control ranges and more programming features see Hearing Instrument Simulation of Connex 8.1 and AudioFit 8.1 or higher.

Rixx 6 G3

Gain 55 dB





MAXIMUM OUTPUT

Input: 90 dB



MAXIMUM GAIN

Input: 50 dB

IEC 60118-7:2005²⁾
ANSI S3.22-2009²⁾

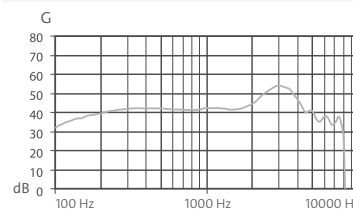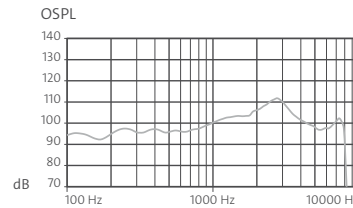

IEC 60118-0³⁾

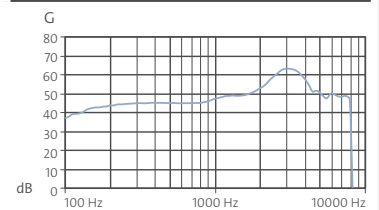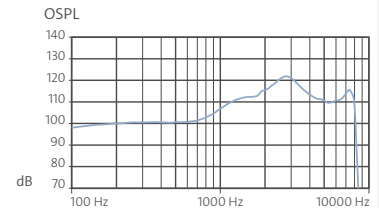

TECHNICAL INFORMATION

MAXIMUM OUTPUT

Peak value at 90 dB	113 dB	123 dB
1,600 Hz (RTF)	104 dB	112 dB
HFA (High Frequency Average)	105 dB	107 dB

FULL ON GAIN

Peak value at 50 dB	55 dB	65 dB
1,600 Hz (RTF)	42 dB	49 dB
HFA (High Frequency Average)	45 dB	48 dB
Reference test gain	28 dB	42 dB

TECHNICAL FEATURES

Battery type	10	10
Battery life in hours	63	63
Frequency range	100 – 8,000 Hz	100 – 8,200 Hz
Battery current consumption	1.00 mA	1.00 mA
Equivalent noise level	19 dB	22 dB
Distortion		
500 Hz	1%	2%
800 Hz	2%	3%
1,600 Hz	1%	2%

²⁾ Technical data measured in accordance with IEC 60118-7:2005 and ANSI S3.22-2009 at 2 ccm coupler

³⁾ Technical data measured in accordance with IEC 60118-0 at ear simulator

⚠ WARNING Small parts present a choking hazard.
This device is not suitable for fitting to babies, small children or mentally disabled persons.

For control ranges and more programming features see Hearing Instrument Simulation of Connex 8.1 and AudioFit 8.1 or higher.

Rixx 6 G3

Gain 60 dB



Audio Service


MAXIMUM OUTPUT

Input: 90 dB


MAXIMUM GAIN

Input: 50 dB

IEC 60118-7:2005²⁾
ANSI S3.22-2009²⁾

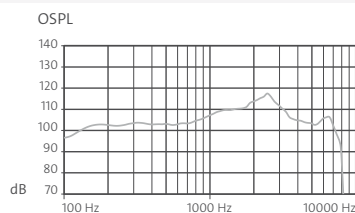

IEC 60118-0³⁾

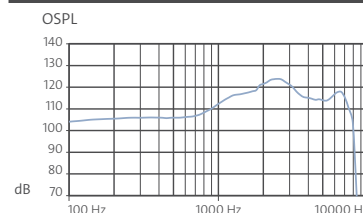

TECHNICAL INFORMATION

MAXIMUM OUTPUT

Peak value at 90 dB	118 dB	126 dB
1,600 Hz (RTF)	110 dB	118 dB
HFA (High Frequency Average)	112 dB	113 dB

FULL ON GAIN

Peak value at 50 dB	60 dB	70 dB
1,600 Hz (RTF)	50 dB	58 dB
HFA (High Frequency Average)	52 dB	54 dB
Reference test gain	35 dB	51 dB

TECHNICAL FEATURES

Battery type	10	10
Battery life in hours	70	70
Frequency range	100 – 7,800 Hz	120 – 8,200 Hz
Battery current consumption	0.90 mA	0.90 mA
Equivalent noise level	19 dB	22 dB
Distortion		
500 Hz	1%	1%
800 Hz	2%	2%
1,600 Hz	1%	1%

²⁾ Technical data measured in accordance with IEC 60118-7:2005 and ANSI S3.22-2009 at 2 ccm coupler

³⁾ Technical data measured in accordance with IEC 60118-0 at ear simulator



WARNING

Small parts present a choking hazard.
This device is not suitable for fitting to babies, small children or mentally disabled persons.

For control ranges and more programming features see Hearing Instrument Simulation of Connex 8.1 and AudioFit 8.1 or higher.