

Sun 16 G3

Gain 45 dB



Audio Service



MAXIMUM OUTPUT

Input: 90 dB



MAXIMUM GAIN

Input: 50 dB

IEC 60118-7:2005³⁾
ANSI S3.22-2009³⁾



IEC 60118-0⁴⁾

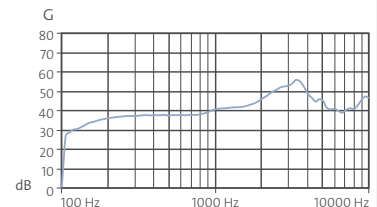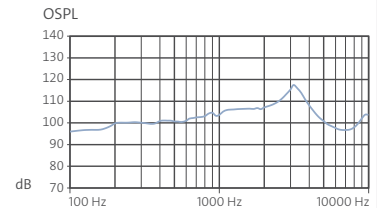

TECHNICAL INFORMATION

MAXIMUM OUTPUT

Peak value at 90 dB	108 dB	118 dB
1,600 Hz (RTF)	99 dB	107 dB
HFA (High Frequency Average)	100 dB	104 dB

FULL ON GAIN

Peak value at 50 dB	45 dB	56 dB
1,600 Hz (RTF)	35 dB	42 dB
HFA (High Frequency Average)	38 dB	41 dB
Reference test gain	23 dB	35 dB

TECHNICAL FEATURES

Battery type	13	13
Battery life in hours	226	226
Frequency range	100 – 10,000 Hz	100 – 10,000 Hz
Battery current consumption	0.90 mA	0.90 mA
Equivalent noise level	18 dB	19 dB
Telecoil sensitivity (1 mA/m)	66 dB	73 dB
Distortion		
500 Hz	1%	1%
800 Hz	1%	1%
1,600 Hz	1%	2%

³⁾ Technical data measured in accordance with IEC 60118-7:2005 and ANSI S3.22-2009 at 2 ccm coupler

⁴⁾ Technical data measured in accordance with IEC 60118-0 at ear simulator



WARNING

Small parts present a choking hazard.
This device is not suitable for fitting to babies, small children or mentally disabled persons.

For control ranges and more programming features see Hearing Instrument Simulation of Connex 7.5 and AudioFit 7.5 or higher.

Sun 16 G3

Gain 60 dB



 **Audio Service**



MAXIMUM OUTPUT

Input: 90 dB



MAXIMUM GAIN

Input: 50 dB

IEC 60118-7:2005³⁾
ANSI S3.22-2009³⁾

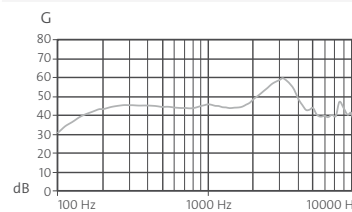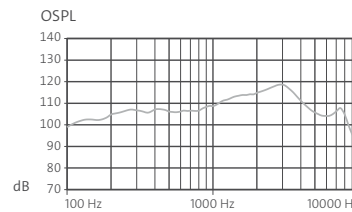

IEC 60118-0⁴⁾

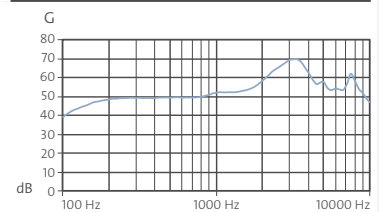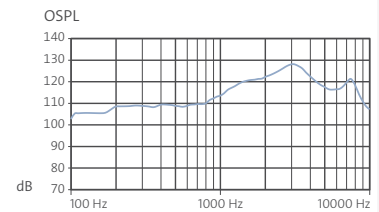

TECHNICAL INFORMATION

MAXIMUM OUTPUT

Peak value at 90 dB	119 dB	128 dB
1,600 Hz (RTF)	114 dB	121 dB
HFA (High Frequency Average)	113 dB	115 dB

FULL ON GAIN

Peak value at 50 dB	60 dB	69 dB
1,600 Hz (RTF)	44 dB	53 dB
HFA (High Frequency Average)	48 dB	53 dB
Reference test gain	36 dB	46 dB

TECHNICAL FEATURES

Battery type	13	13
Battery life in hours	185	185
Frequency range	100 – 9,000 Hz	100 – 10,000 Hz
Battery current consumption	1.10 mA	1.10 mA
Equivalent noise level	19 dB	23 dB
Telecoil sensitivity (1 mA/m)	78 dB	84 dB
Distortion		
500 Hz	1%	1%
800 Hz	1%	2%
1,600 Hz	2%	1%

³⁾ Technical data measured in accordance with IEC 60118-7:2005 and ANSI S3.22-2009 at 2 ccm coupler

⁴⁾ Technical data measured in accordance with IEC 60118-0 at ear simulator



WARNING

Small parts present a choking hazard.
This device is not suitable for fitting to babies, small children or mentally disabled persons.

For control ranges and more programming features see Hearing Instrument Simulation of Connex 7.5 and AudioFit 7.5 or higher.

Sun 16 G3

Gain 70 dB²⁾





MAXIMUM OUTPUT

Input: 90 dB



MAXIMUM GAIN

Input: 50 dB

IEC 60118-7:2005³⁾
ANSI S3.22-2009³⁾



IEC 60118-0⁴⁾

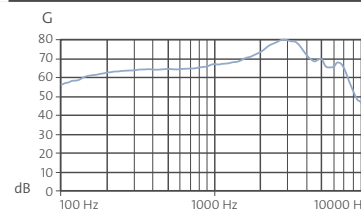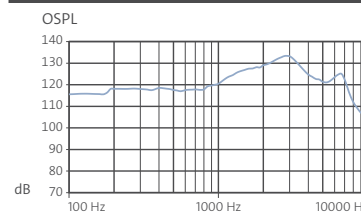

TECHNICAL INFORMATION

MAXIMUM OUTPUT

Peak value at 90 dB	124 dB	133 dB
1,600 Hz (RTF)	119 dB	127 dB
HFA (High Frequency Average)	119 dB	122 dB

FULL ON GAIN

Peak value at 50 dB	70 dB	80 dB
1,600 Hz (RTF)	56 dB	68 dB
HFA (High Frequency Average)	60 dB	68 dB
Reference test gain	42 dB	53 dB

TECHNICAL FEATURES

Battery type	13	13
Battery life in hours	203	203
Frequency range	100 – 7,500 Hz	100 – 8,100 Hz
Battery current consumption	1.00 mA	1.00 mA
Equivalent noise level	18 dB	20 dB
Telecoil sensitivity (1 mA/m)	83 dB	89 dB
Distortion		
500 Hz	1%	3%
800 Hz	2%	3%
1,600 Hz	1%	2%

²⁾ 70 dB measured with CLIC MOULD 2.0, values vary if domes are used for fitting
³⁾ Technical data measured in accordance with IEC 60118-7:2005 and ANSI S3.22-2009 at 2 ccm coupler
⁴⁾ Technical data measured in accordance with IEC 60118-0 at ear simulator

WARNING Small parts present a choking hazard. This device is not suitable for fitting to babies, small children or mentally disabled persons.

WARNING The maximum output levels of the hearing systems can reach or exceed 132 dB SPL. Risk of injury to the hearing of the wearer. Ensure that the hearing systems are fitted with care.

For control ranges and more programming features see Hearing Instrument Simulation of Connex 7.5 and AudioFit 7.5 or higher.

10.2015 / Subject to change without prior notice. Color deviation possible due to printing process.