

quiX 16 G3

WITH BATTERY SIZE 10



PRODUCT FEATURES

CIC with standard housing
 Components as small as possible
 Receiver with dual-chamber technology

BASIC FEATURES

Battery compartment as on/off switch with loss protection
 Level-dependent signal tones/melodies (activate/deactivate) for low battery voltage, on/off function
 Audiomatic power-on delay (P) (activate/deactivate)
 Microsafe microphone filter
 Wax guard HF 4 Black
 Carbon removal line
 ComforMed (P) coating

OPTIONS



Smart Remote App
 Click Domes (Open, Semi-open, Closed or Double)
 quiX Mould (S, M or P)

PROGRAMMING CABLES

Programming cable, right	Art.-No. 105 40 984
Programming cable, left	Art.-No. 105 40 985

TECHNICAL FEATURES

40 signal processing channels / 20 frequency channels
 20 AGC channels / 20 MPO channels
 1-6 hearing programs
 Data Logging

SIGNAL PROCESSING

Anti-Feedback system G3
 Noise Manager

- > Adaptive noise reduction
- > Wiener filter
- > Impulse suppressor
- > Auto-situation adaption


Frequency and dynamics concept

- > TRC S
- > Selective frequency compression
- > HiFi functionality

AUTOMATIC FUNCTIONS

Intelligent Acclimatic
 Comformatic

FITTING RANGES

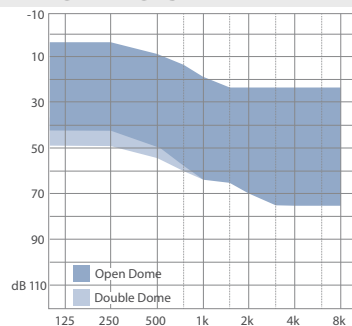

P = Patent

For more information about features please check out our website www.audioservice.com

quiX 16 G3

Gain 40 dB





MAXIMUM OUTPUT

Input: 90 dB



MAXIMUM GAIN

Input: 50 dB

IEC 60118-7:2005¹⁾
ANSI S3.22-2009¹⁾

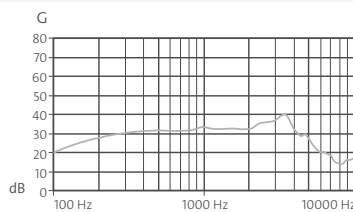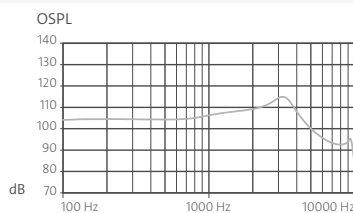

IEC 60118-0²⁾

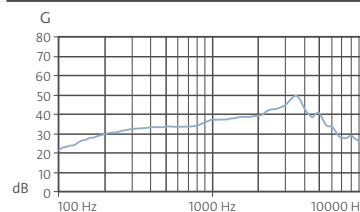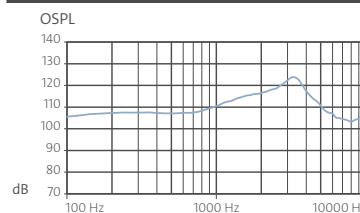

TECHNICAL INFORMATION

MAXIMUM OUTPUT

Peak value at 90 dB	115 dB	125 dB
1,600 Hz (RTF)	108 dB	115 dB
HFA (High Frequency Average)	109 dB	111 dB

FULL ON GAIN

Peak value at 50 dB	40 dB	50 dB
1,600 Hz (RTF)	32 dB	39 dB
HFA (High Frequency Average)	33 dB	37 dB
Reference test gain	32 dB	32 dB

TECHNICAL FEATURES

Battery type	10	10
Battery life in hours	90	90
Frequency range	100 – 10,000 Hz	100 – 10,000 Hz
Battery current consumption	0.70 mA	0.70 mA
Equivalent noise level	24 dB	23 dB
Distortion		
500 Hz	1%	1%
800 Hz	2%	2%
1,600 Hz	1%	2%

¹⁾ Technical data measured in accordance with IEC 60118-7:2005 and ANSI S3.22-2009 at 2 ccm coupler

²⁾ Technical data measured in accordance with IEC 60118-0 at ear simulator



WARNING

Small parts present a choking hazard.
This device is not suitable for fitting to babies, small children or mentally disabled persons.

For control ranges and more programming features see Hearing Instrument Simulation of Connex 8.1 and AudioFit 8.1 or higher.